

For reference only. See data sheet for the detailed specifications.




Technical Specification



Frequency Range(GHz)	8.9 – 11.7
Waveguide	WR90
Gain(dBic)	20 Typ.
Polarization	RHCP
Axial Ratio(dB)	0.8 Typ. ; 2.0 Max.
3dB Beamwidth(deg)	E Plane: 15 Typ.
	H Plane: 15 Typ.
VSWR	A Type: 1.15:1 Max.
	C Type: 1.50:1 Max.
Output	A Type: FBP100(UBR100)
	C Type: SMA-Female or N-Female or TNC-Female or 7mm or 3.5mm-Female
Material	Al
Finish	Chemical Conversion Coating, Gray Paint
Size(mm)	A Type: 127 x 127 x 458
	C Type: 127 x 127 x 496
Net Weight(Kg)	A Type: 0.70 Around
	C Type: 0.75 Around



Outline Drawing (Size: mm)

FBP100 Output (P/N: LB-CNH-90-20-R16-A)

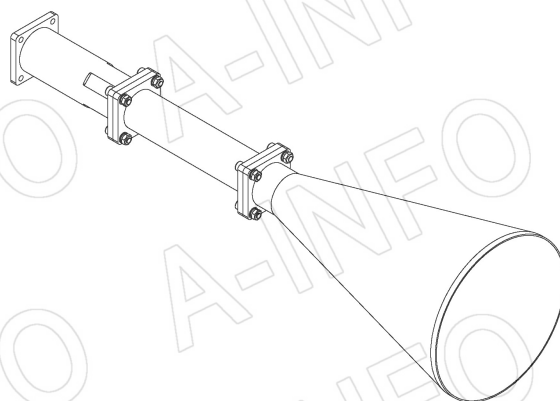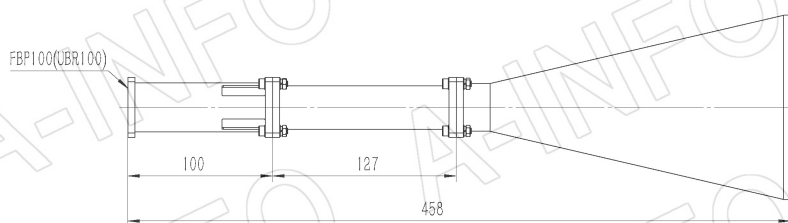



SMA-Female Output (P/N: LB-CNH-90-20-R16-C-SF)

For N-Female, TNC- Female, 7mm or 3.5mm-Female output outline drawing, please contact A-INFO.

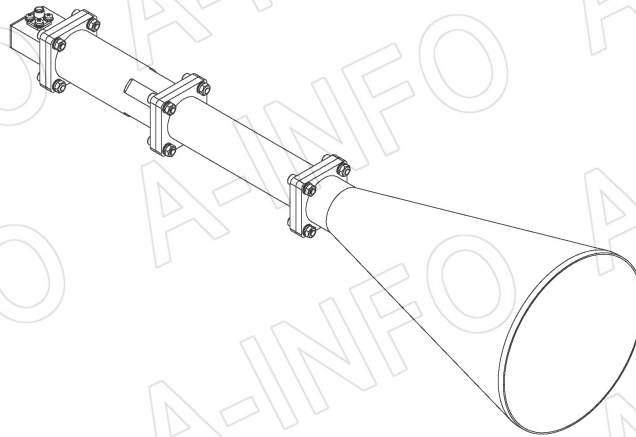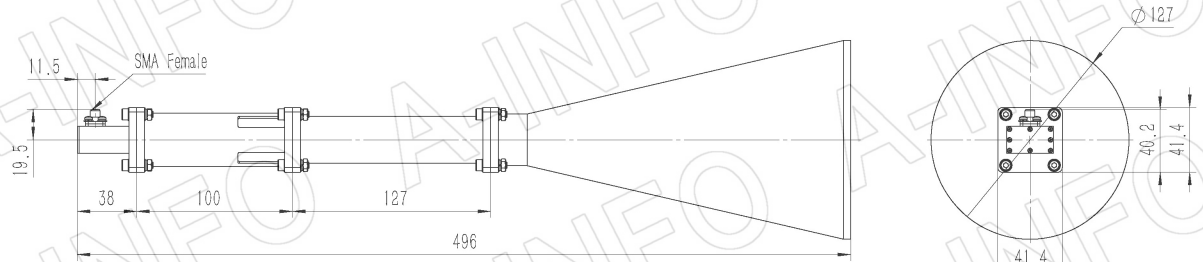


SMA-Female Output with Round Mounting Bracket (Option, P/N: LB-CNH-90-10-MB)

For N-Female, TNC- Female, 7mm or 3.5mm-Female output outline drawing, please contact A-INFO.

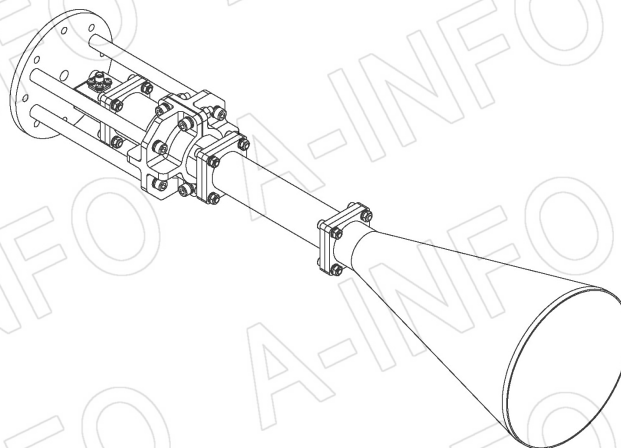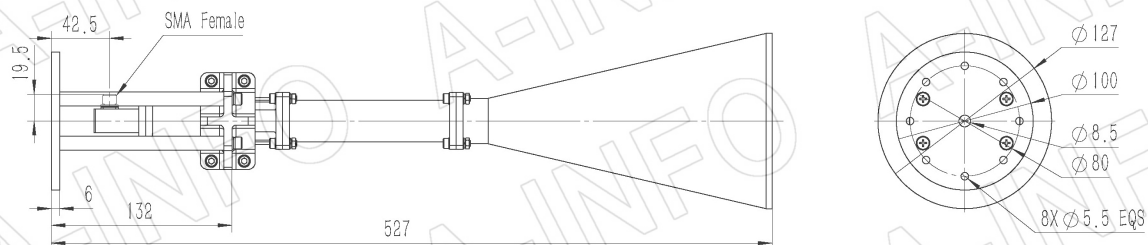


SMA-Female Output with L Type Mounting Bracket (Option, P/N: LB-CNH-90-10-MBL)

For N-Female, TNC- Female, 7mm or 3.5mm-Female output outline drawing, please contact A-INFO.

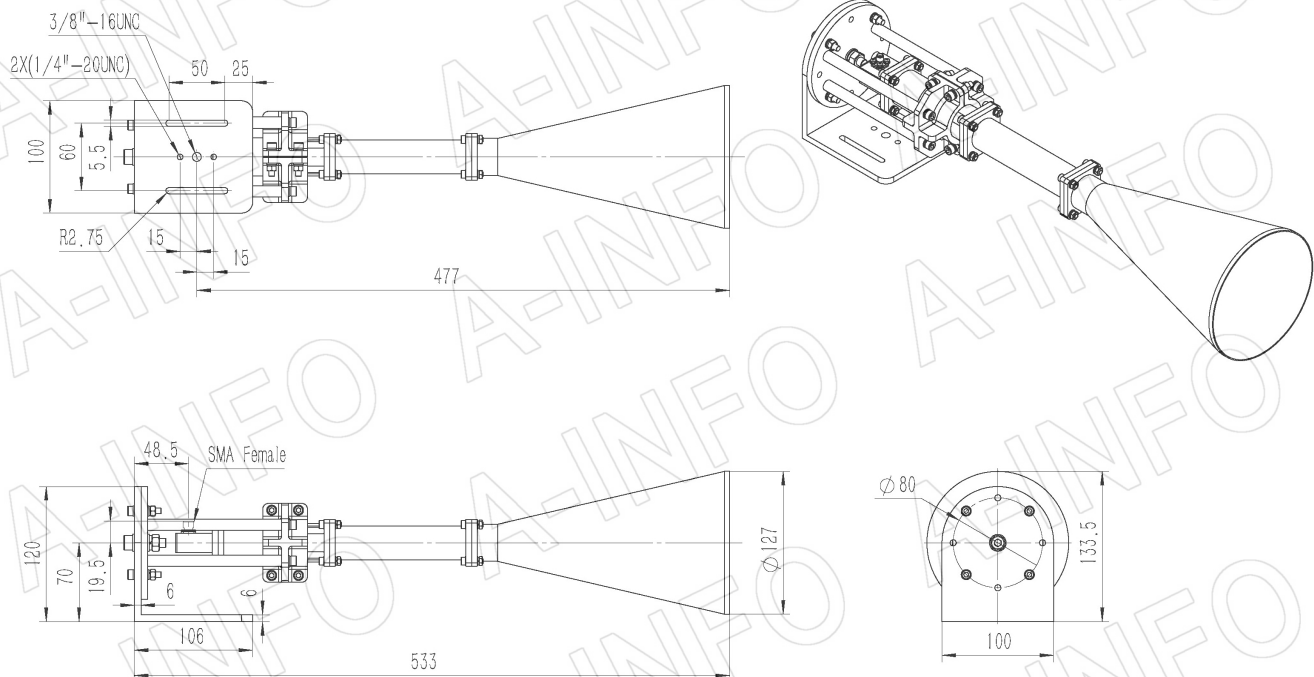


Flange Drawing (Size: mm)

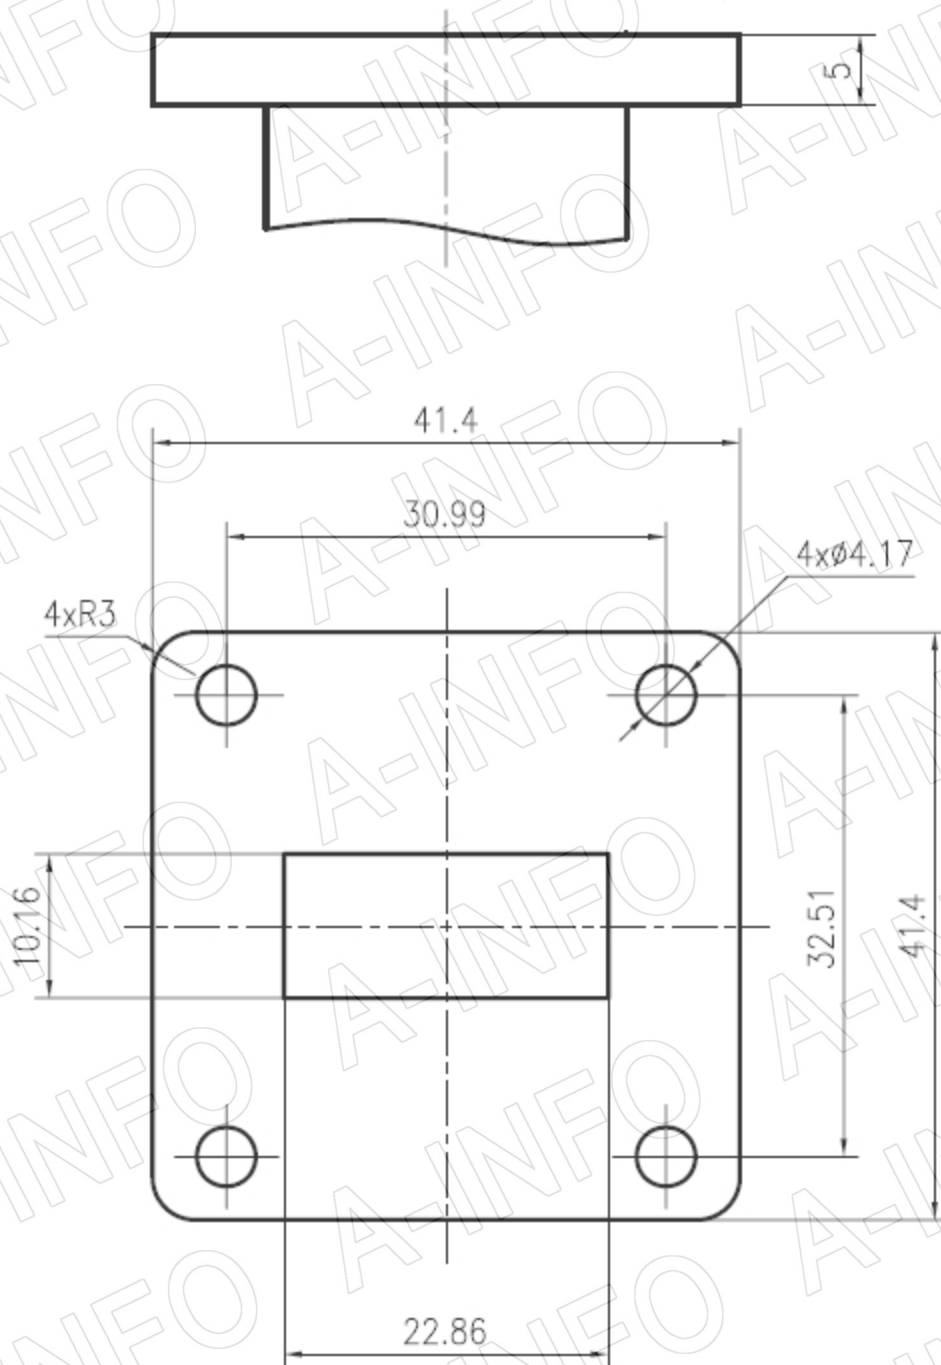


FBP100

Test Results


1. Gain

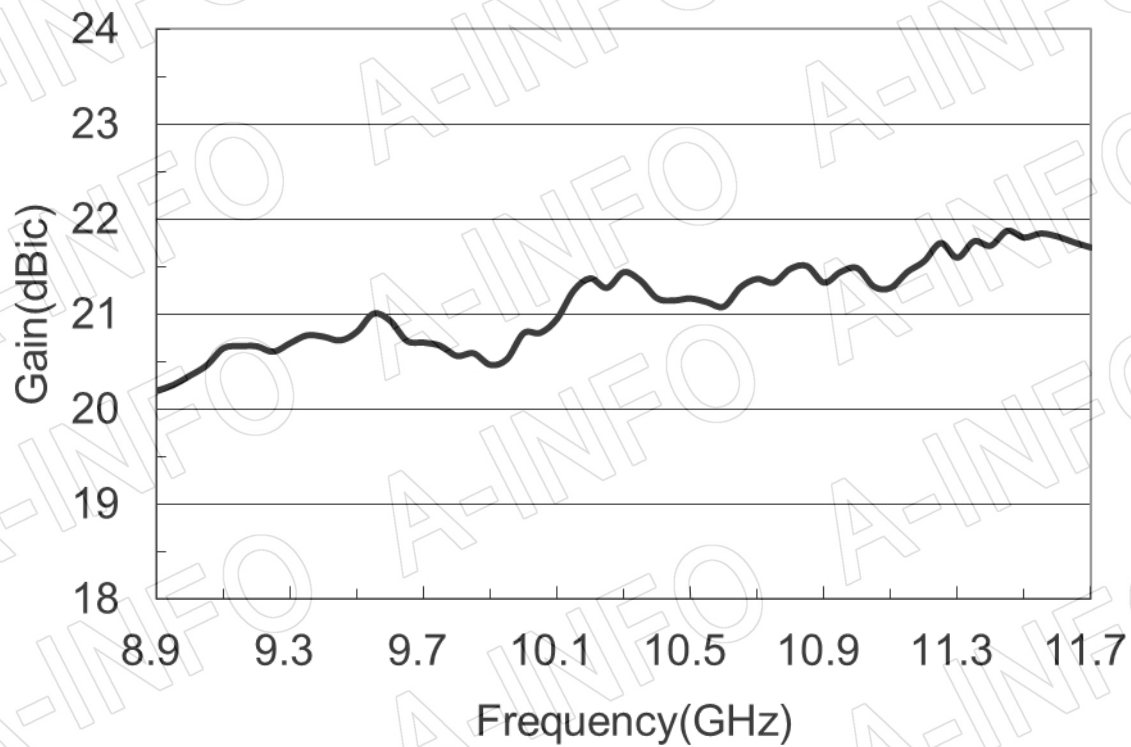


2. Axial Ratio

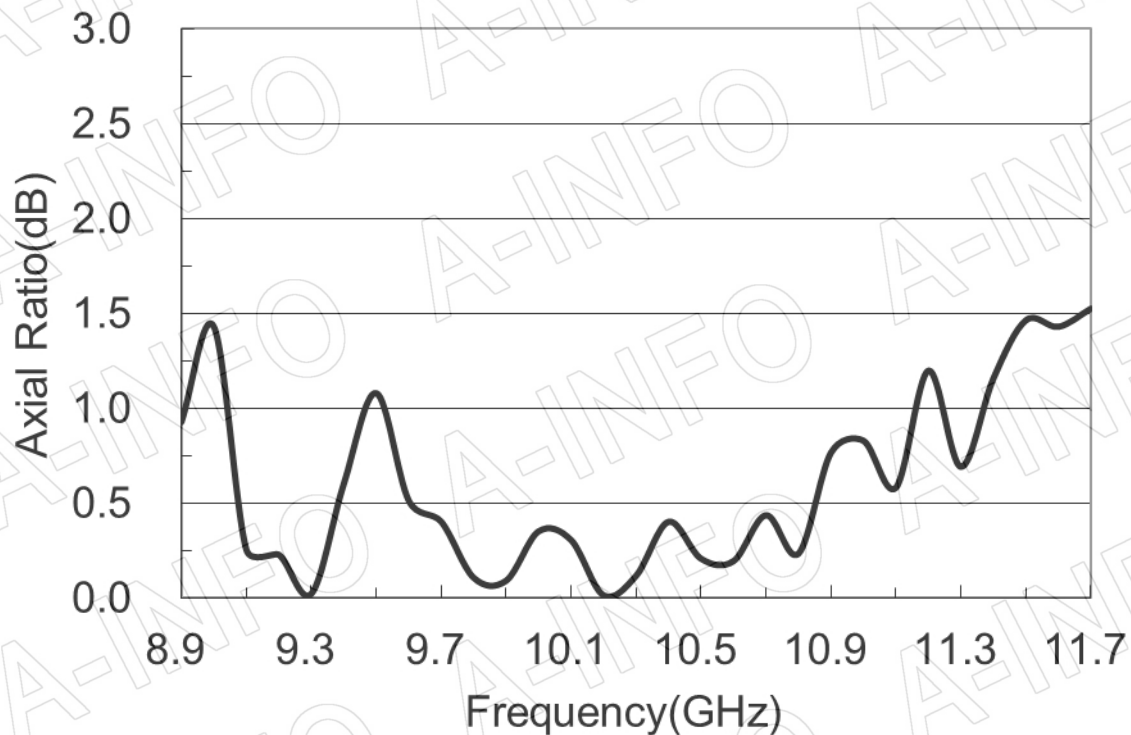

3. VSWR_A Type

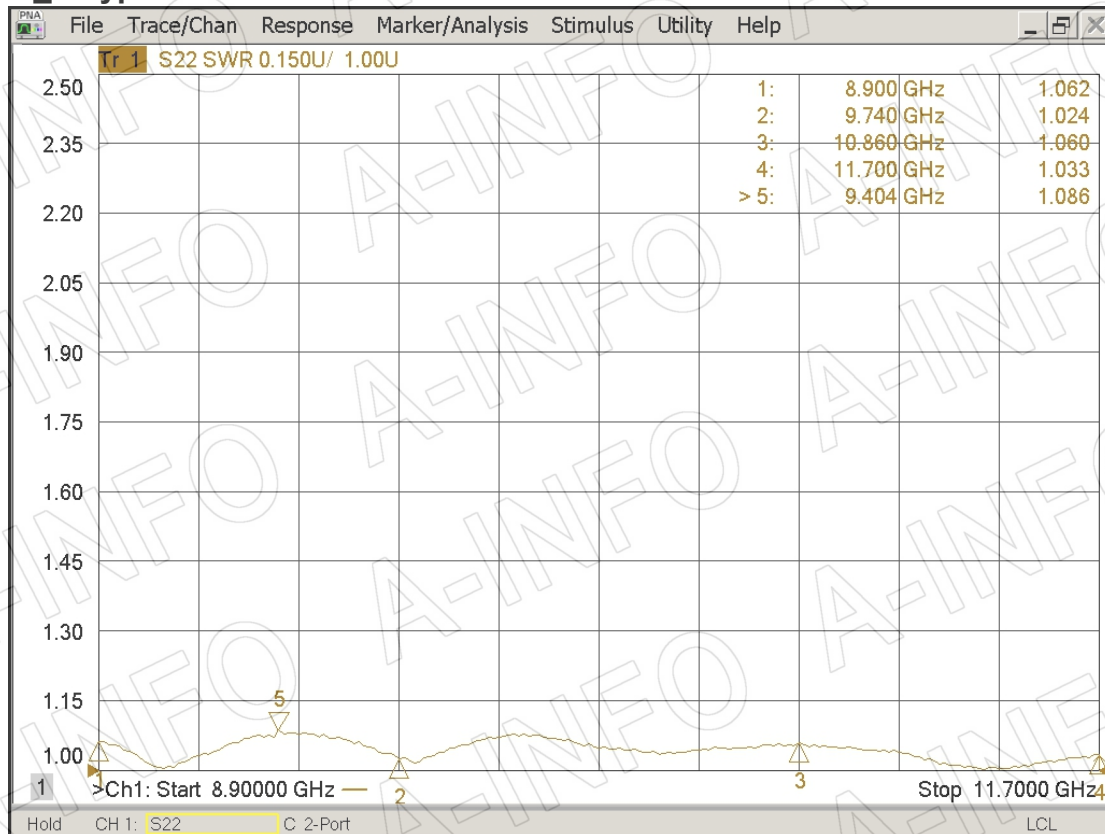

VSWR_C Type

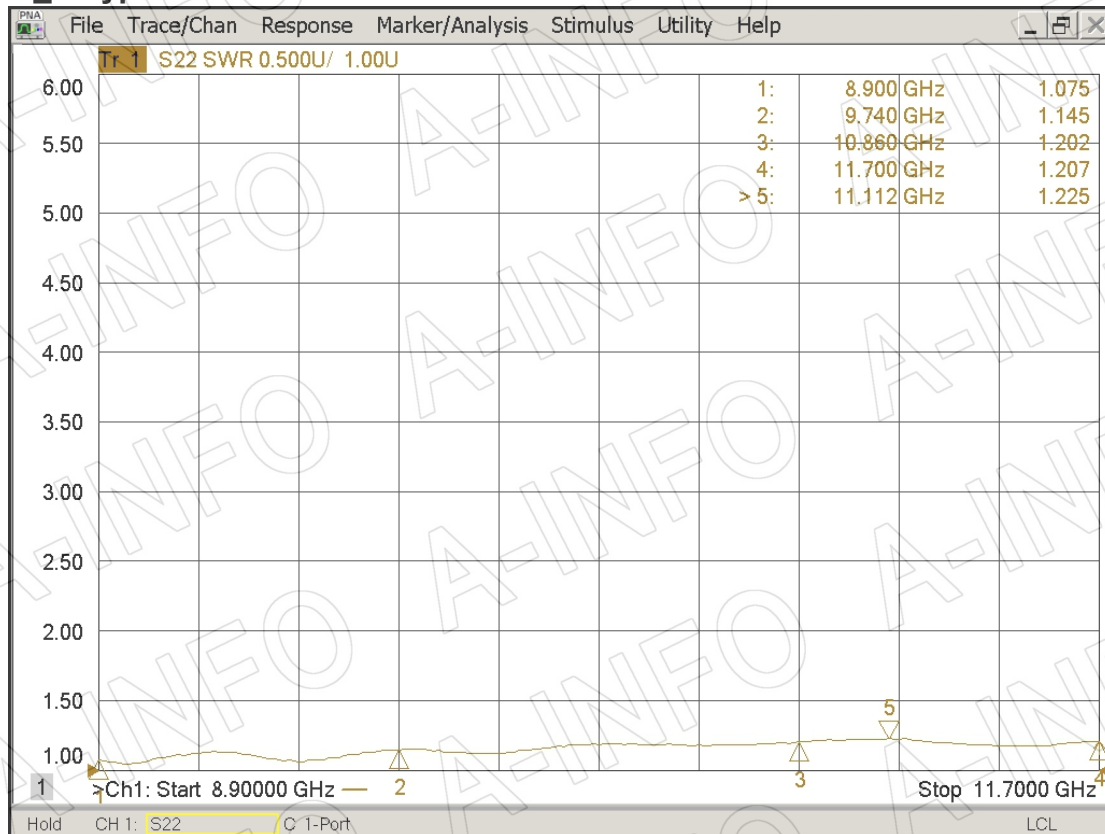

4. Pattern

