



For reference only. See data sheet for the detailed specifications.

## Technical Specification

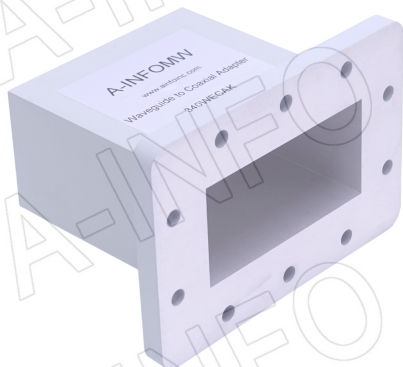

|                      |                                            |
|----------------------|--------------------------------------------|
| EIA WR               | WR340                                      |
| Frequency Range(GHz) | 2.2 – 3.3                                  |
| Insertion Loss(dB)   | 0.20 Max.                                  |
| VSWR                 | 1.25:1 Max.                                |
| Flange               | FDP26(UDR26)                               |
| Connector            | 2.92mm-Female                              |
| Average Power(W CW)  | 20 Max.                                    |
| Peak Power(KW)       | 0.04                                       |
| Material             | Al                                         |
| Finish               | Chemical Conversion Coating,<br>Gray Paint |
| Size(mm)             | 112.8 x 138.1 x 95.3                       |
| Net Weight(Kg)       | 0.74 Around                                |

## Outline Drawing (Size: mm)

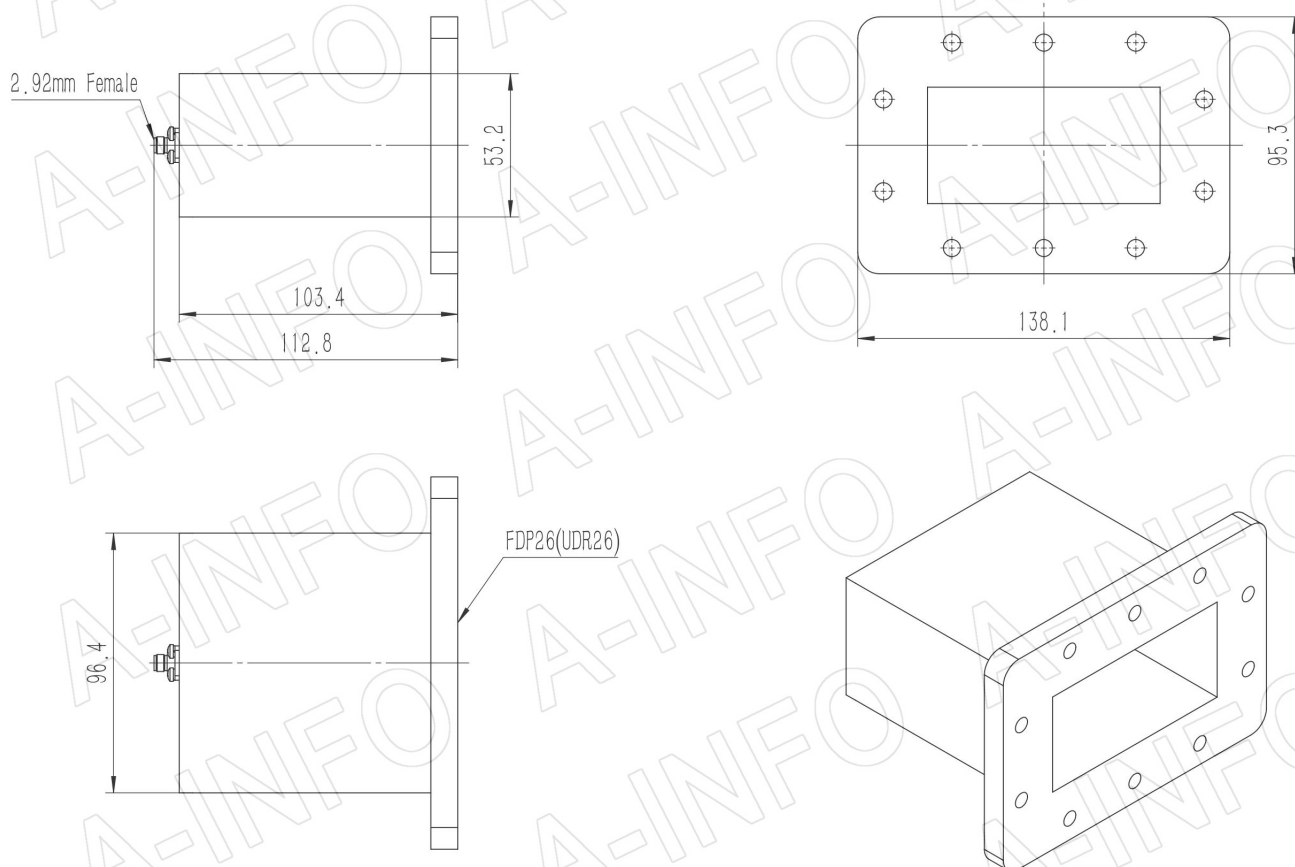

**AINFO Inc.**


China(Beijing): Tel: (+86) 10-6266-7326,  
China(Chengdu): Tel: (+86) 28-8519-2786,  
USA : Tel: (+1) 949-639-9688,

Page 1 of 3

(+86) 10-6266-7327 Fax: (+86) 10-6266-7379  
(+86) 28-8519-3044 Fax: (+86) 28-8519-3068  
(+1) 949-639-9608 Fax: (+1) 949-639-9670

Website: [www.ainfoinc.com](http://www.ainfoinc.com)  
Email: [sales@ainfoinc.com](mailto:sales@ainfoinc.com)


## Flange Drawing (Size: mm)

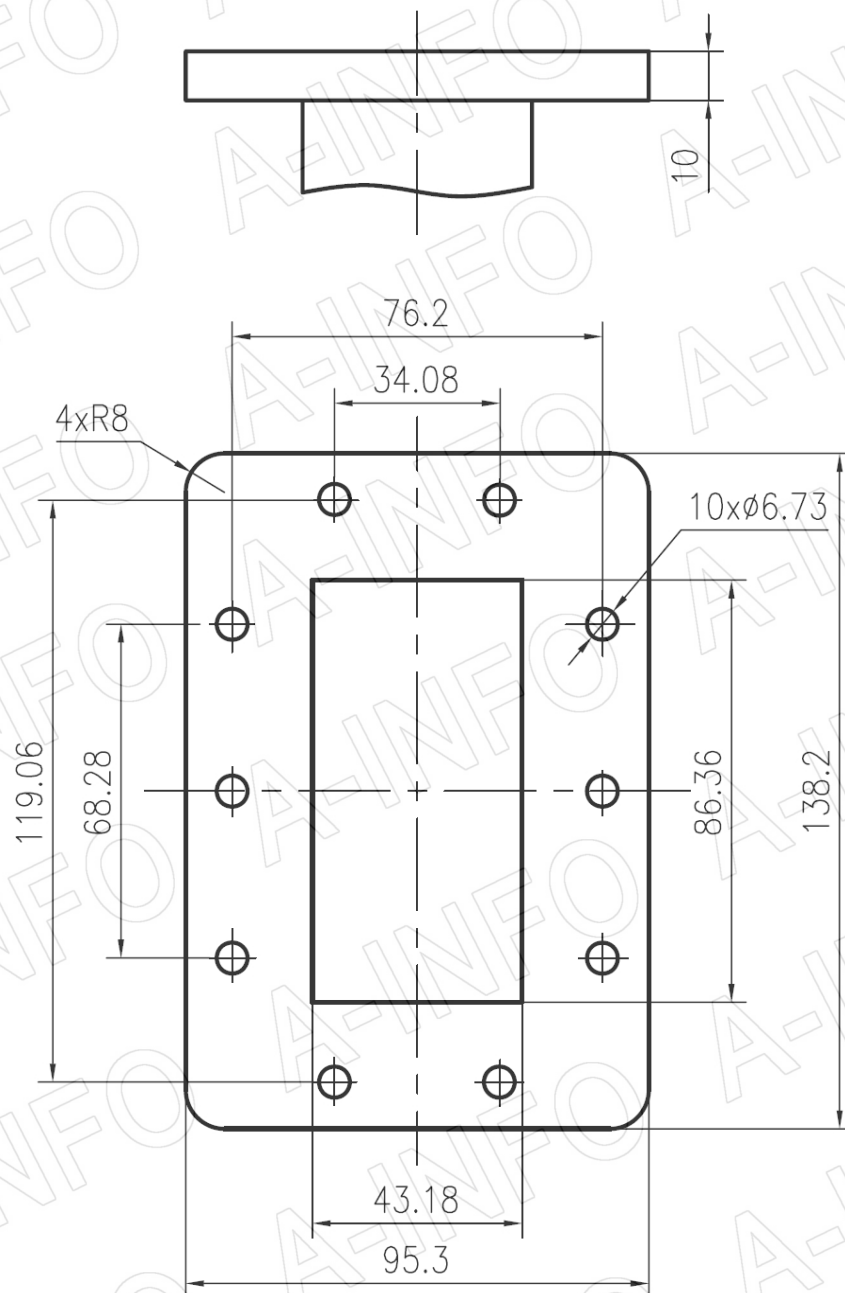

## FDP26

## Test results

I.L.(Test with two adapters back to back)

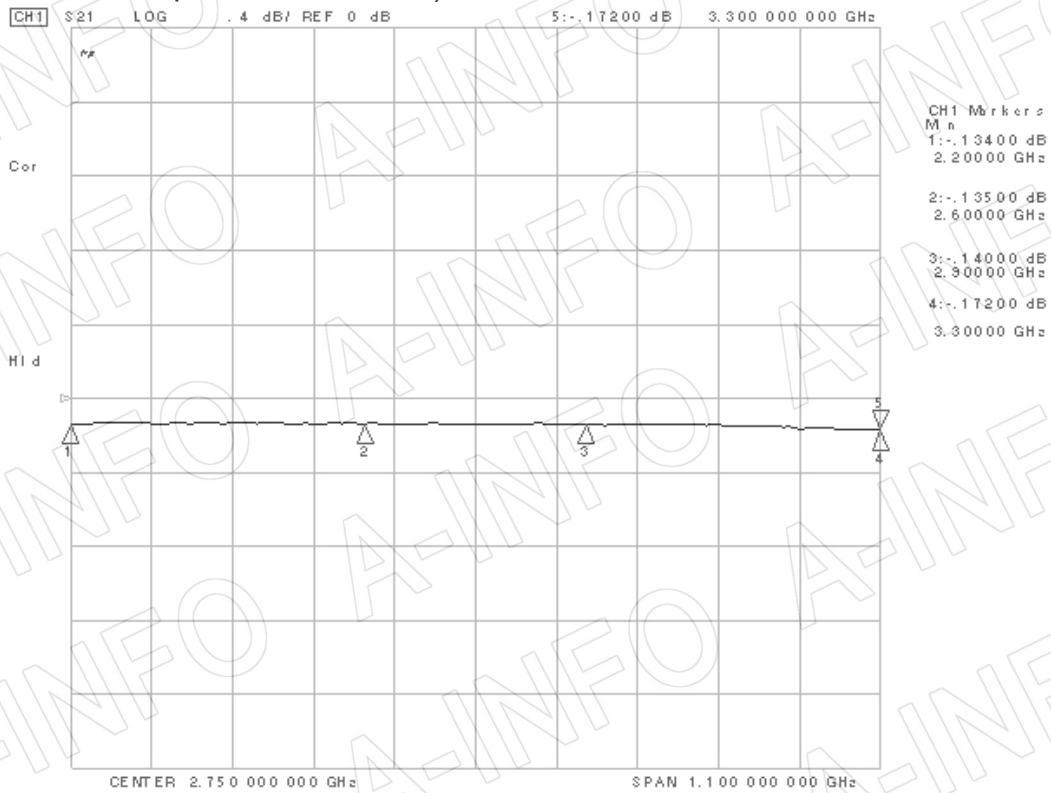

## VSWR

