





For reference only. See data sheet for the detailed specifications.

Technical Specification

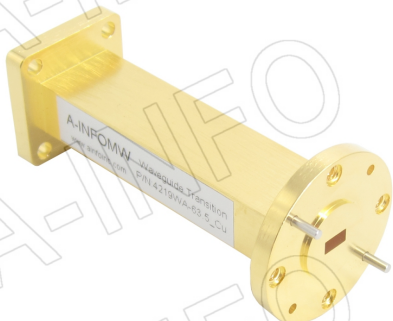


EIA WR to WR	WR42 to WR19
Frequency Range(GHz)	WR42: 18.0 - 26.5
	WR19: 40.0 - 60.0
Length(mm/inch)	63.5/2.5
Insertion Loss(dB)	0.25 Max.
VSWR	1.10:1 Max.
WR42 Flange	FBP220(UBR220)
WR19 Flange	FUGP500(UG-383/U-M)
Material	Cu
Finish	Gold Plated
Size(mm)	63.5 x 28.6 x 28.6
Net Weight(Kg)	0.09 Around



Outline Drawing (Size: mm)

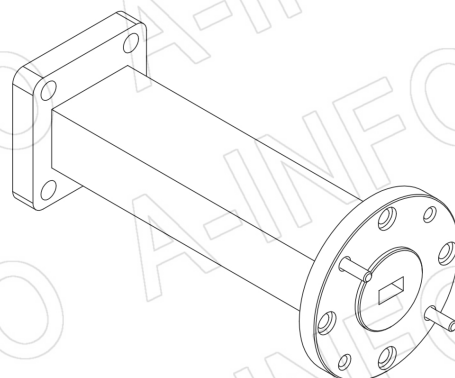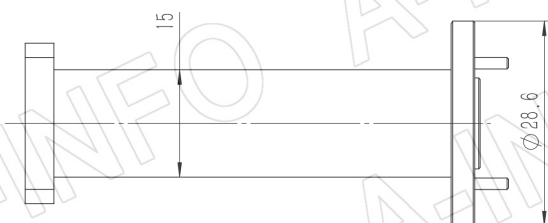

Outline Drawing (Size: mm)

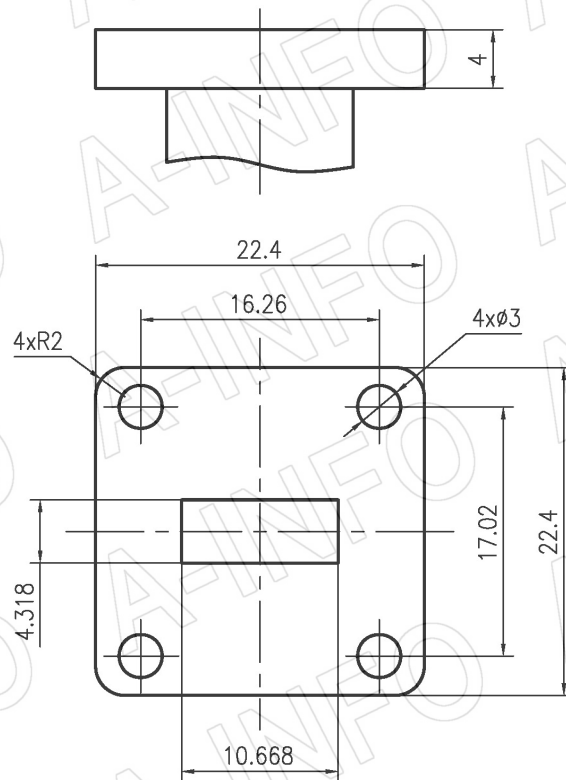

FBP220

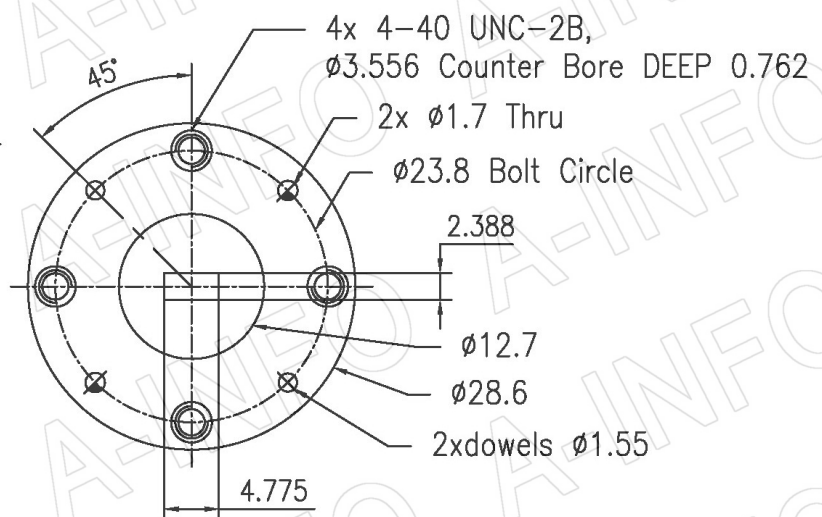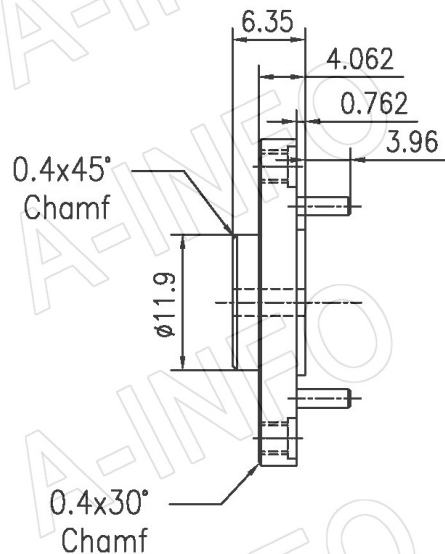


FUGP500

(equivalent to UG-383/U-M)

Test Results

Insertion Loss (Test with two transitions back to back)

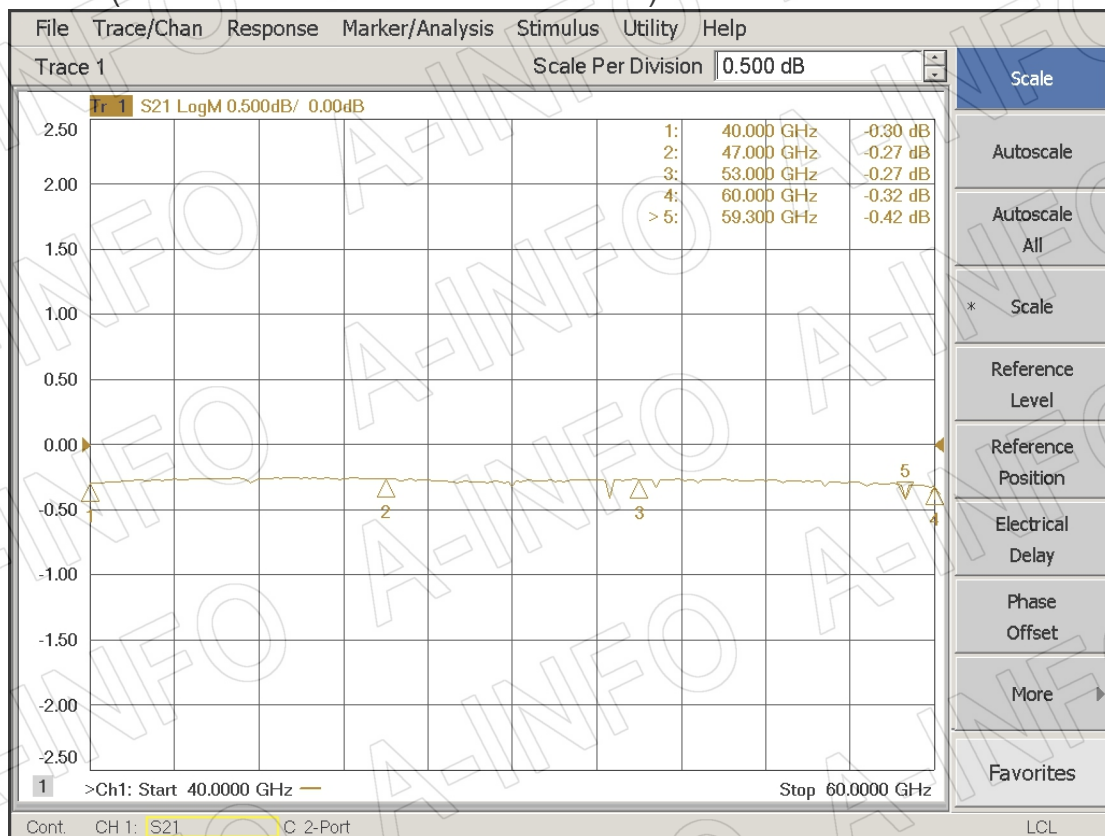

VSWR

