




For reference only. See data sheet for the detailed specifications.

Technical Specification

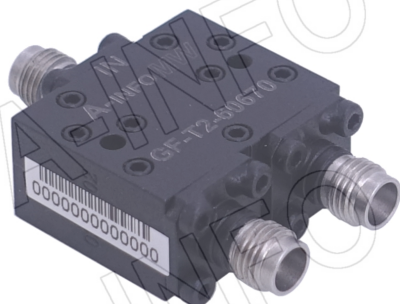


Frequency Range(GHz)	6.0 – 67.0
Input VSWR	1.80:1 Max.
Output VSWR	1.80:1 Max.
Insertion Loss(dB)	2.6 Max. (Not including the theoretical loss 3.0dB)
Isolation(dB)	16 Min.
Amplitude Balance(dB)	±0.6 Max.
Phase Balance(°)	±8 Max.
Power Handling (W CW)	10 Max.
Connector	1.85mm-Female
Operating Temp.(°C)	-55 ~ +85
Material	Al
Finish	Chemical Conversion Coating, Black Paint
Size(mm)	21.4 x 26.9 x 12.7
N.W.(Kg)	0.04 Around

Outline Drawing (Size: mm)

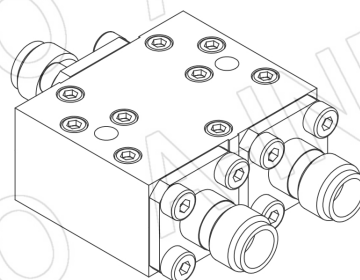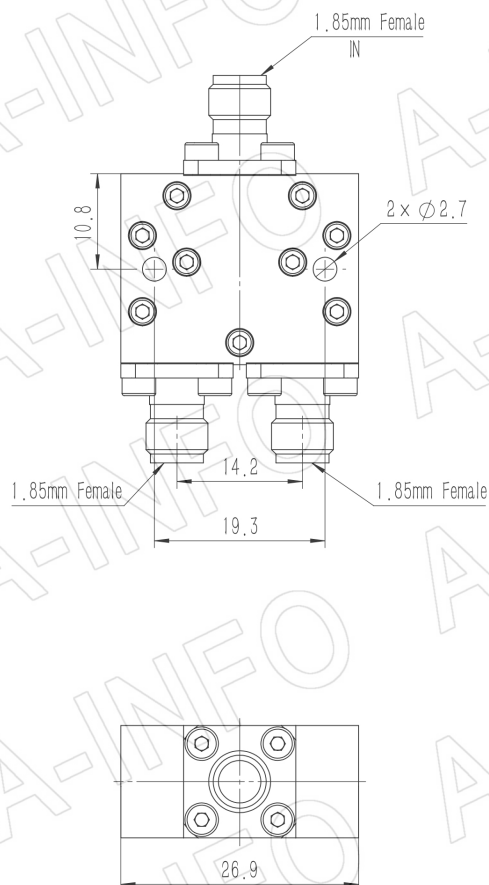


Test Results

I.L.(Including the theoretical loss 3.0dB) & VSWR

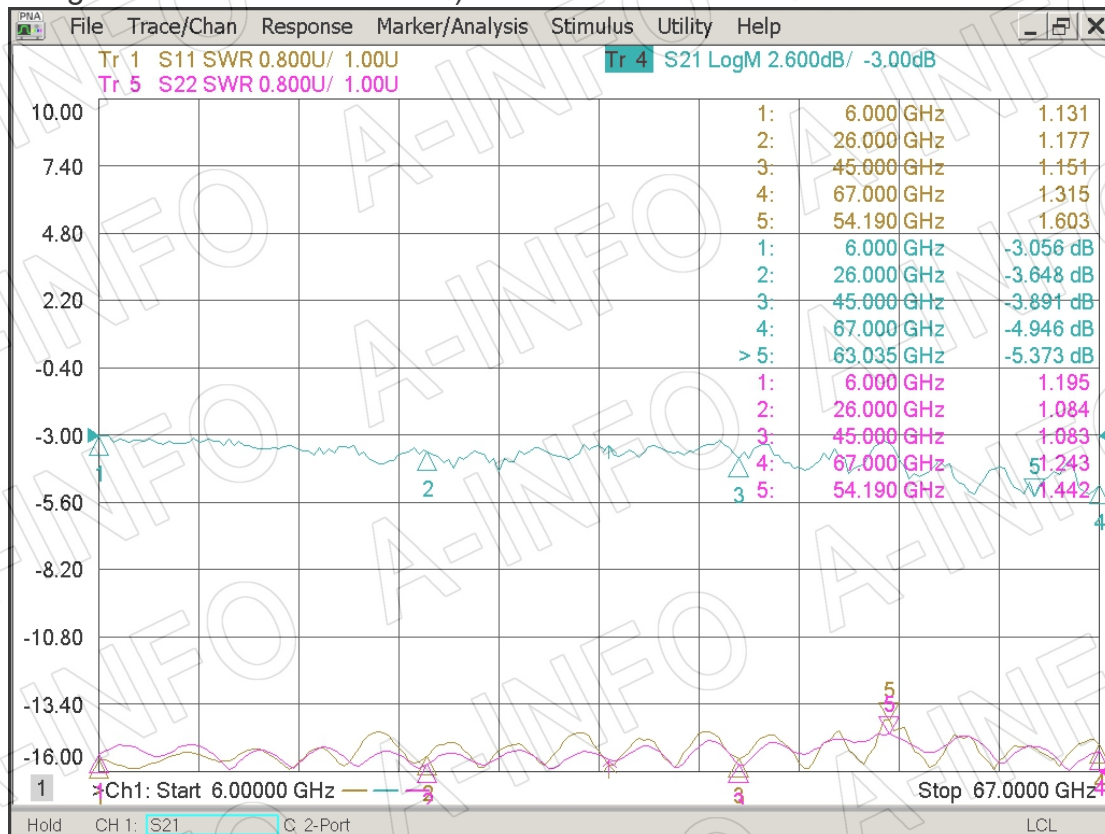

Isolation

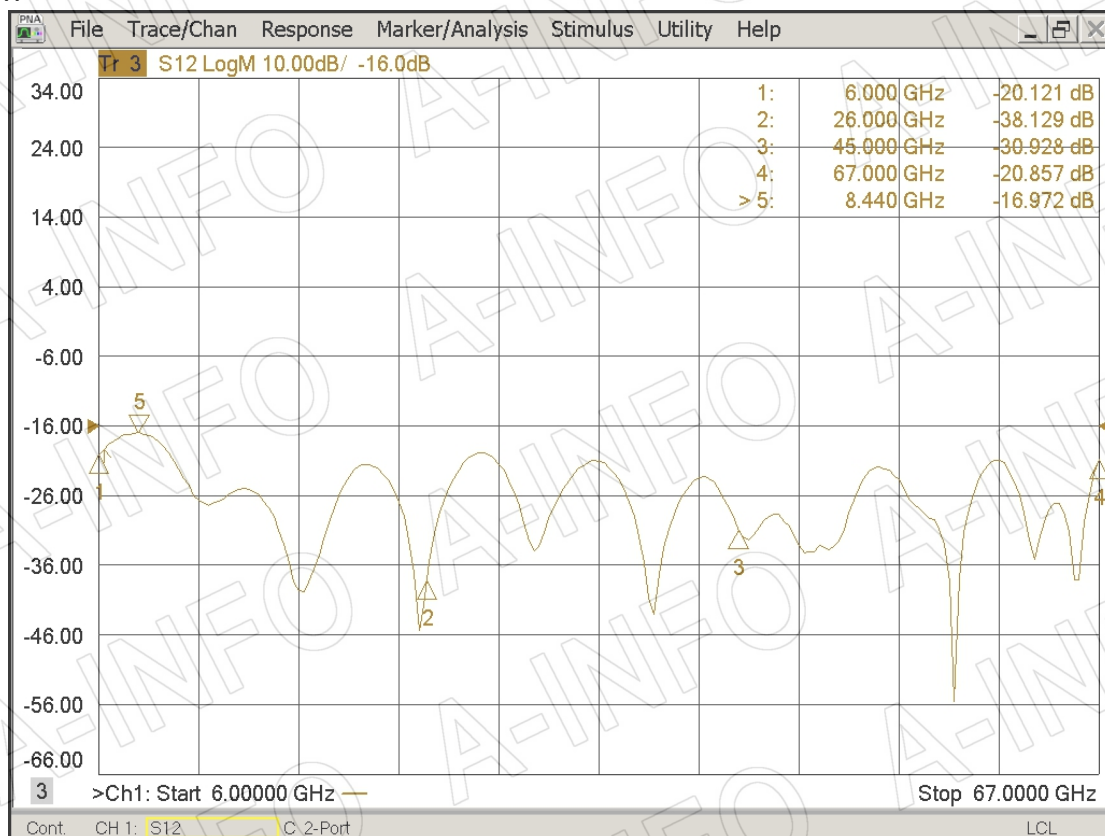

Amplitude Balance & Phase Balance & VSWR

