

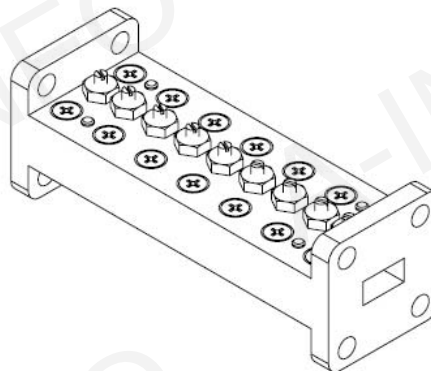


## Technical Specification




|                          |                      |
|--------------------------|----------------------|
| EIA WR                   | WR28                 |
| Center Frequency(GHz)    | 35.0                 |
| 0.5dB Pass Band(GHz)     | 34.0 - 36.0          |
| Insertion Loss at f0(dB) | 0.5 Max.             |
| Rejection(dB)            | 60 Min. @ 32.4445GHz |
|                          | 60 Min. @ 38.5-40GHz |
| VSWR                     | 2.0:1 Max.           |
| Flange                   | FBP320(UBR320)       |
| Material                 | Cu                   |
| Size(mm)                 | 55 x 19.1 x 19.1     |
| Net Weight(Kg)           | 0.06 Around          |

## Outline Drawing (Size: mm)

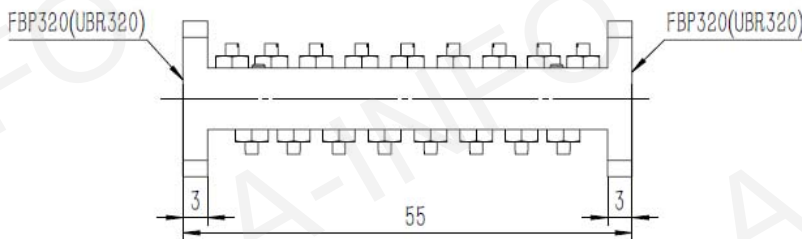

## Flange Drawing (Size: mm)

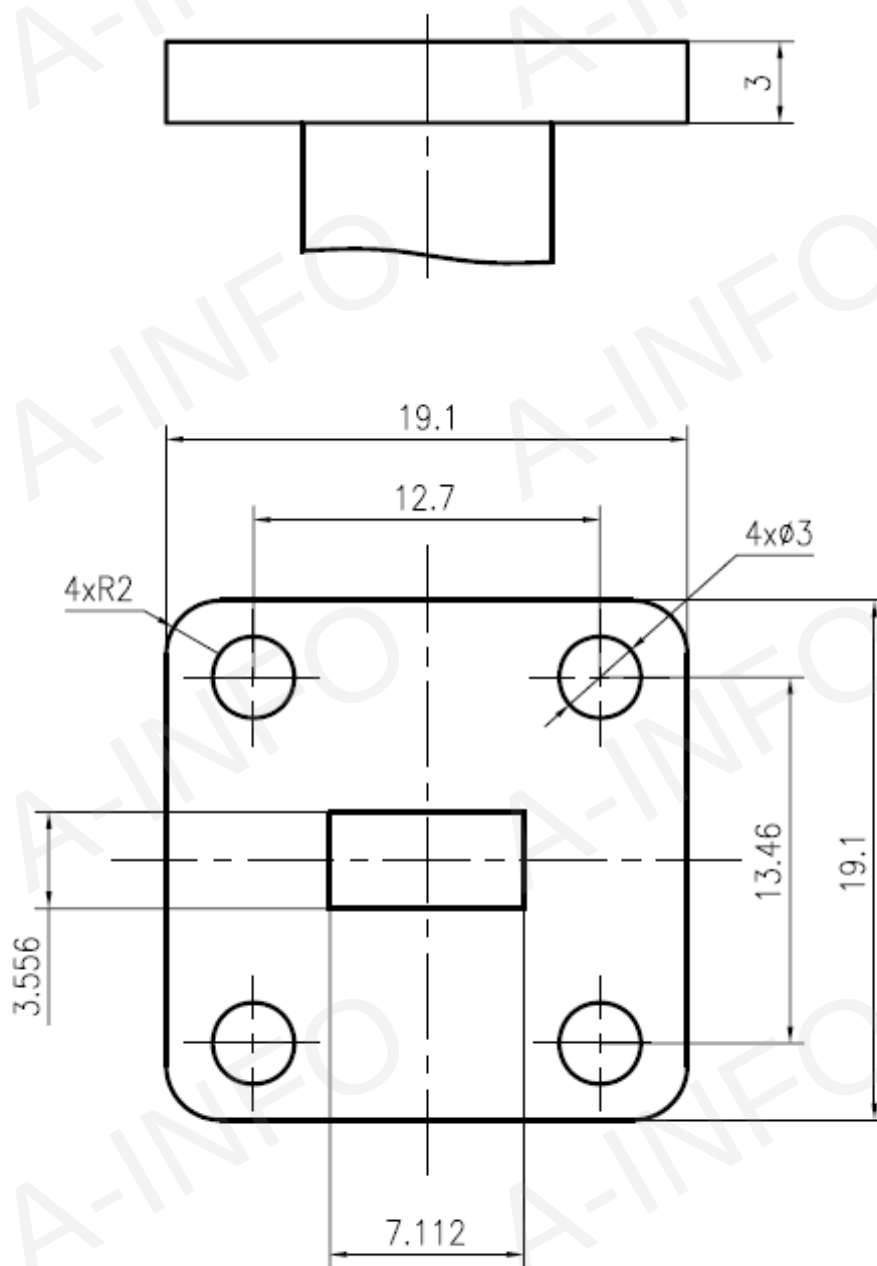

FBP320

AINFO Inc.

Page 2 of 3

China(Beijing):  
China(Chengdu):  
USA :

Tel: (+86) 10-6266-7326,  
Tel: (+86) 28-8519-2786,  
Tel: (+1) 949-639-9688,

(+86) 10-6266-7327  
(+86) 28-8519-3044  
(+1) 949-639-9608

Fax: (+86) 10-6266-7379  
Fax: (+86) 28-8519-3068  
Fax: (+1) 949-639-9670

Website: [www.ainfoinc.com](http://www.ainfoinc.com)  
Email: [sales@ainfoinc.com](mailto:sales@ainfoinc.com)

## Test Results

### Insertion Loss & Rejection & VSWR

